

5CH / RGBWA DMX DECODER

DATASHEET



■ Technical Specifications

Operating Voltage :	12VDC~24VDC
---------------------	-------------

Power Consumption :	1W
---------------------	----

Input Signal :	DMX512
----------------	--------

DMX Data :	1 - 512
------------	---------

Output Channels :	5CH / RGBW
-------------------	------------

Output Current :	5x8A (Max.)
------------------	-------------

Address Type :	Button
----------------	--------

Body Type :	ABS
-------------	-----

Body Color :	Black / Grey
--------------	--------------

Mounting Type :	DIN Rail
-----------------	----------

Warranty :	2 Years
------------	---------

Protection :	IP20
--------------	------

Weight :	320 gr
----------	--------


Operating temperature :	-20°C to + 50°C
-------------------------	-----------------

Storage temperature :	-40°C to + 85°C
-----------------------	-----------------


Operating humidity :	≥5% -95% RH
----------------------	-------------

Dimension :	86x69x59mm
-------------	------------

■ Dimensions

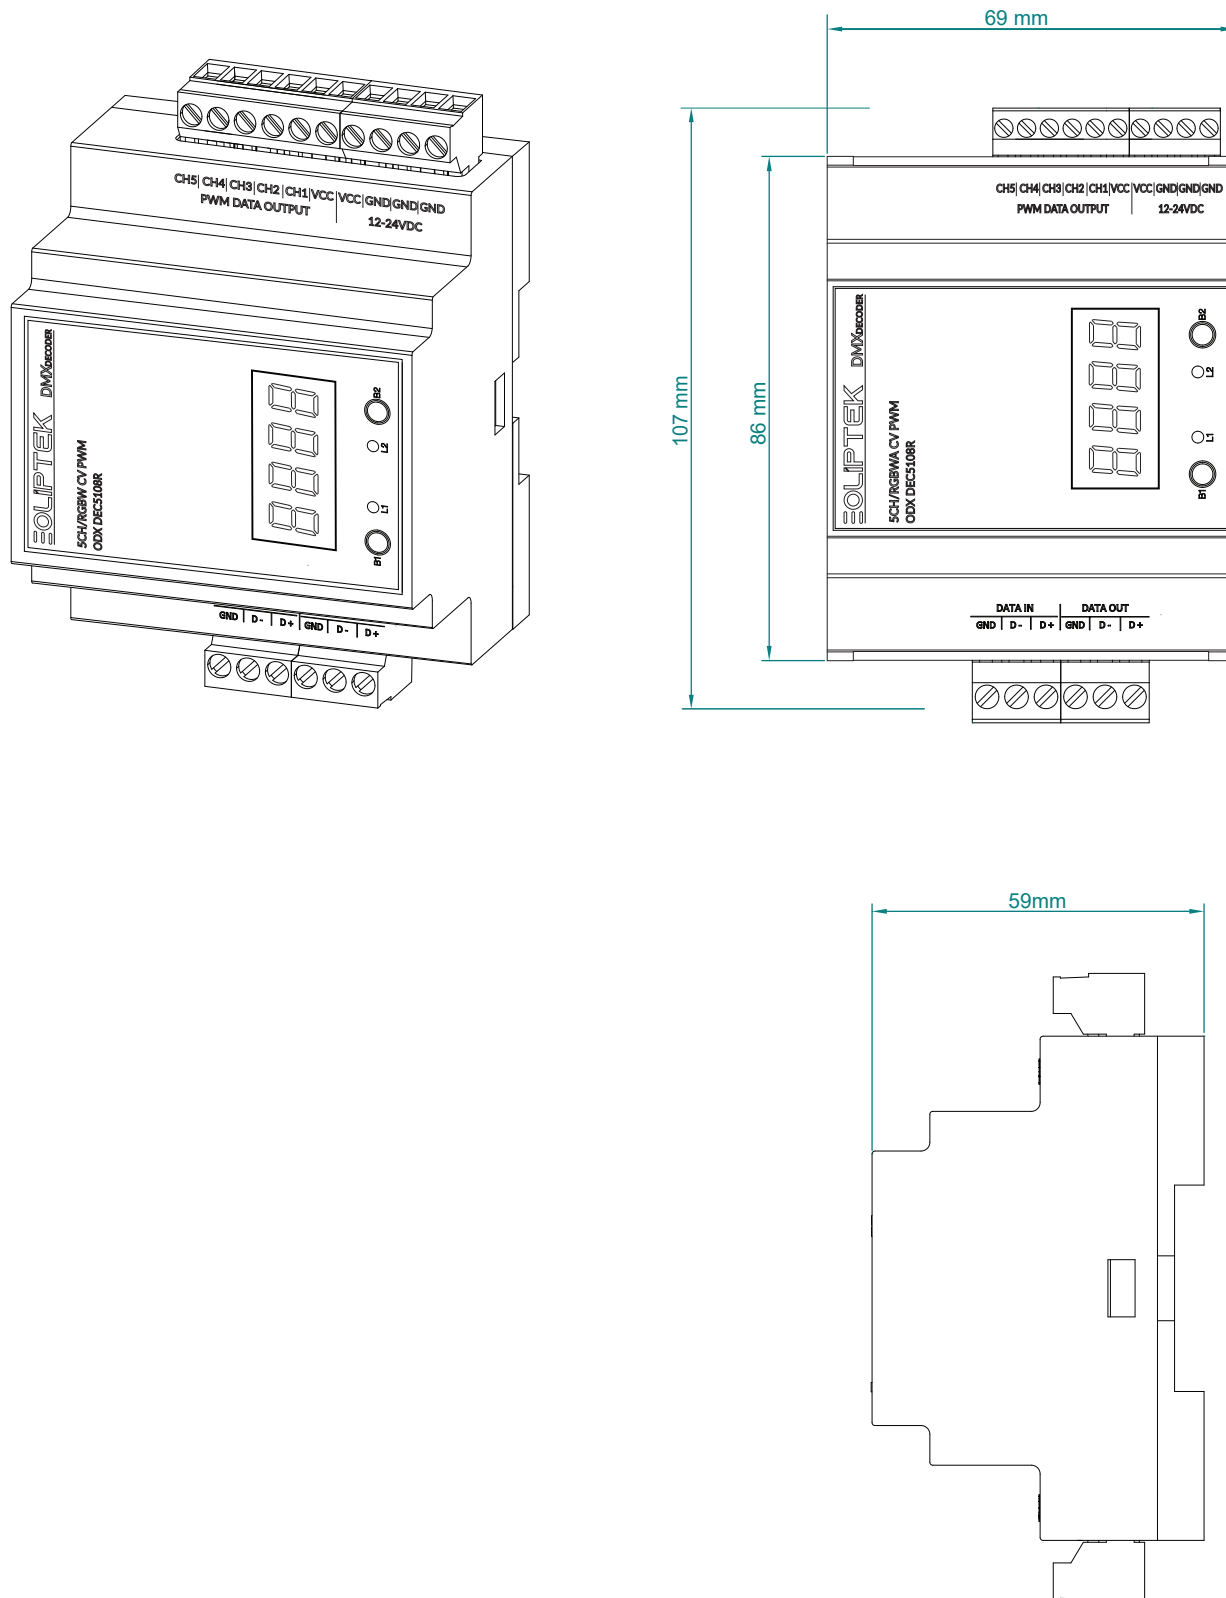

■ DMX Addressing Examples

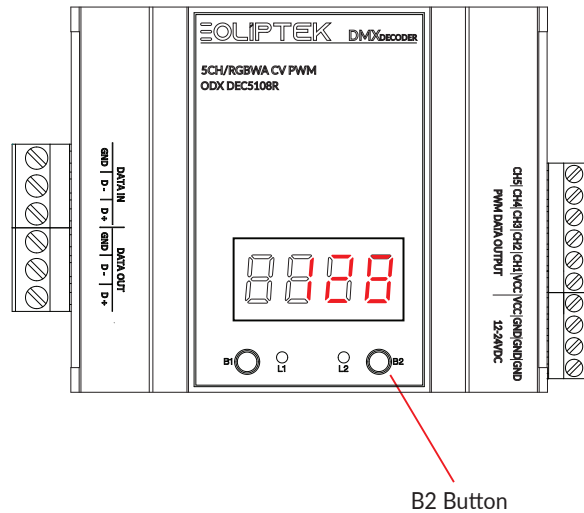

- * Hold down the B2 button, and release it upon the activation of the screen.
- * The displayed address represents the device's configured address. To modify the address, press and hold the B2 button again. Release it when the screen initiates a blinking pattern.
- * The first digit will enter a flashing state. Individually press the B2 button to reach the desired numeric value. Press the B2 button once more and wait. Release it when the next digit begins to flash.
- * To adjust the value of the second digit, press the B2 button individually until the desired numeric value is achieved. Press the B2 button and wait; release it when the third digit starts flashing.
- * Alter the numerical value in the third digit by pressing the B2 button individually. Continue pressing the B2 button until the screen displays "REC."

This method concludes the addressing procedure

■ Schematics Diagram

