

SKYLINER SINGLE CCT/COLOR DATASHEET



■ Technical Specifications


LED type:	SMD LED (2835)
Control types:	PWM
LED per meter:	120
Operating voltage:	24VDC
Power consumption:	8W/m - 10W/m
LED brand	Cree / Nichia
LED lifespan:	>100.000 hours
Beam angle:	120°

Color dept:	3000K - 4000K - 6500K Red - Green - Blue - Amber
Body:	UV Protected Polycarbonate
Diffuser color:	Clear or semi-opaque
Body color:	Grey
Protection:	IP67 , IK10
Weight:	300 gr/m
Operating temperature:	-20°C to + 65°C
Storage temperature:	-40°C to + 85°C
Operating humidity:	≥5% -95% RH

Maximum Fixture in Line







SKYLINER120 SINGE CCT	10m.
SKYLINER120 SINGE COLOR	8m.

ALL SKYLINER SERIES'S
DATA AND POWER INPUT IS
MALE SOCKET SIDE

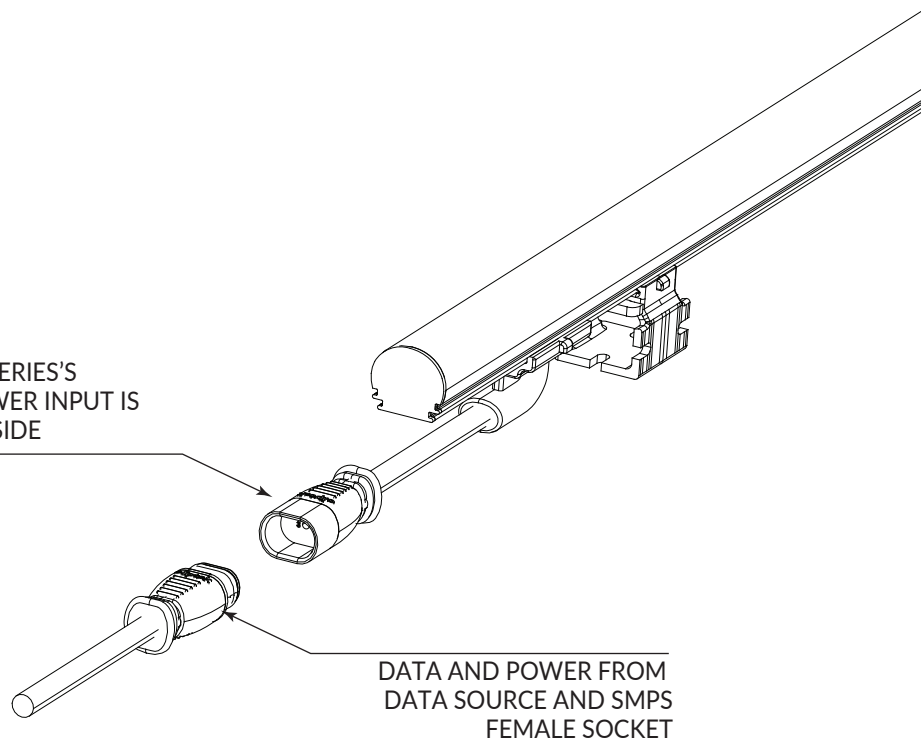


■ Dimensions

120LED | 306mm
406mm
506mm
606mm
1006mm
1506mm
2006mm

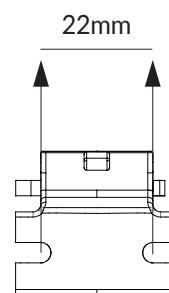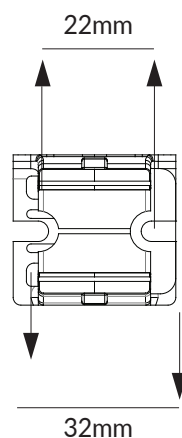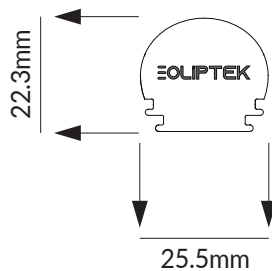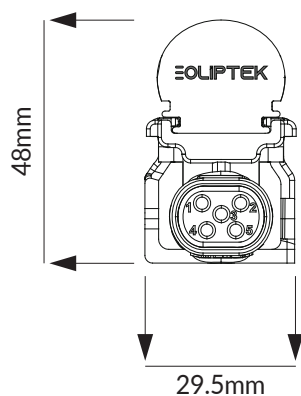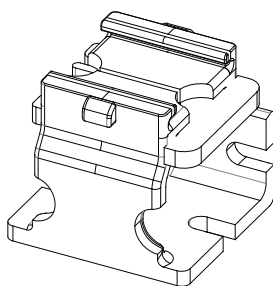
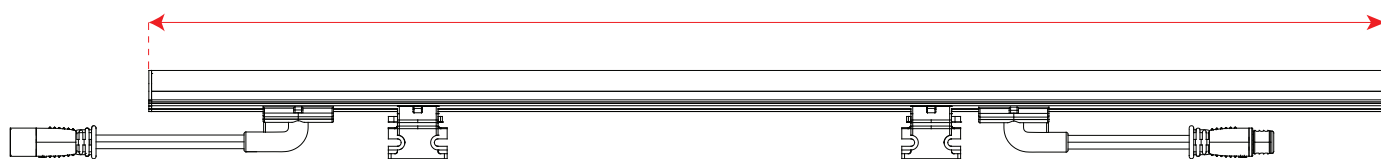


■ Cable & Sockets

Male Socket Side

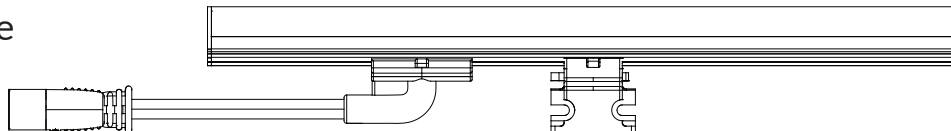


MALE SIDE

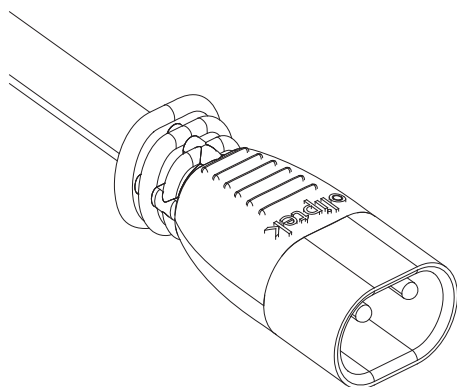



Cable Type:	2x1,5mm ² TTR
Socket Pin Out	1 - +24VDC
Cable Colors:	2- GND



Female Socket

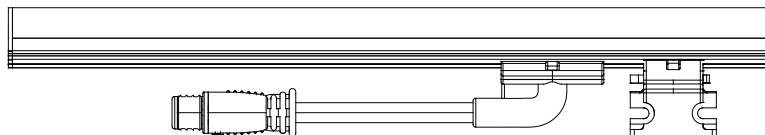

FEMALE SIDE

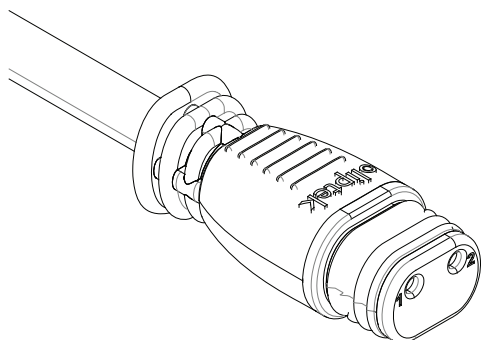

Cable Type:	2x1,5mm ² TTR
Socket Pin Out	1 - +24VDC
Cable Colors:	2- GND

