


POIPIX MINI

DATASHEET

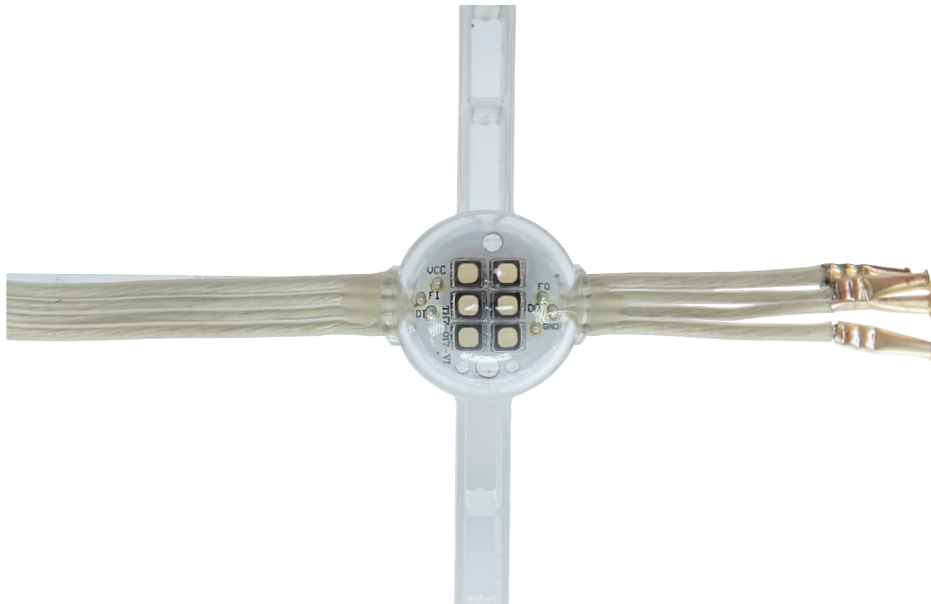

■ Technical Specifications

Pixel pitch:	56,25mm 75mm 100mm <small>(Pixel pitch can be customized)</small>
Pixel configuration:	6*SMD3535
Panel size:	450*7200mm 600*9600mm 800*12800mm <small>(size can be customized)</small>
Panel resolution:	8*128
Panel weight:	5.5kg/m ² 3.5kg/m ² 2.5kg/m ²
Brightness:	5000nit 2400nit 1300nit <small>(Nationstar 3535SMD)</small>
Fresh rate:	1000-3000Hz
Transparent rate:	%75 %85 %90
Scan mode:	Static

Max. power consumption:	400W/m ² 250W/m ² 130W/m ²
Color processing:	12bit
Viewing angle:	140°/110°
Main power source:	AC100-240V; 50/60Hz
Input voltage:	24VDC
IP Rating:	IP 65
Operating temperature:	-20°C ~ 85°C
Humidity:	10% -90% RH
Life time:	>100.000 Hours

